

High security safes Models "Amsterdam"

European standard PN-EN 1143-1:2006, Class V, proved and certified by IMP, Cert. no. P41/269/2007 (2981) and
fire-proof protection LFS 30 P in accordance with European standard EN 15659
Cert. no. P41/079/2009 (3305), proved and certified by IMP

Burglar-proof protection in accordance with PN-EN 1143-1:2006 class V, Certificate no. P41/269/2008 (2981), proved and certified by IMP Multi-wall body and door with heavy-duty, special concrete filling. Door thickness of 144 with 3-side door latching with noble steel bolt and shaped rigid latch at the hinge side protecting the door against opening after hinges are forced open. An external hinge allows door opening up to 180°. The closing and locking system applied reliably protects against burglary. Moreover, in case of burglary attempt, additional, emergency door latching is activated. Factory prepared cabinets' anchoring to a floor in standard. The compact construction ensures a specified burglar-proof protection against robbery using mechanical and thermal breaking in tools. (Burglar-proof protection 180/270 RU). Prepared for the installation of intrusion detection system components to be connected to the system. (double insurance value, please contact your insurer) Latching in standard with superior safety double bit (DB) lock, (incl. 1 rigid key and one articulated key) and additionally mechanical lock with numerical combination. At request and at extra charge available also with other lock combinations, also luxury fittings are available at extra charge – metal plated with gold or chromium. Paint coating: RAL 7035 grey

Special dimensions and versions available at extra charge – the basics for calculation see customer terms and conditions
Technical data of mechanical locks with numerical combination and electronic lock, see special product pages Locks and fittings!



Art. 42703 +
42723 + 42726



30 min of fire protection for paper (temp. Approx. 840°C thanks to special concrete filling and seals. Fire rating LFS30P according to EN 15659)

Art.No.	Model	External dimensions in mm HxWxD			Internal dimensions in mm HxWxD			Clear door measurements in mm HxW	No of shelves	No of files	Capacity L	Weight Kg
42701	AMSTERDAM	842	672	538	656	504	299	650x486	2	6	99	584,0
42702	AMSTERDAM	942	672	538	756	504	299	750x486	2	12	114	647,0
42703	AMSTERDAM	1042	672	538	856	504	299	850x486	2	12	129	694,0
42704	AMSTERDAM	1242	672	538	1056	504	299	1050x486	3	18	159	806,0
42705	AMSTERDAM	1542	842	578	1356	674	339	1350x656	3	24	310	1192,0
42706	AMSTERDAM	1842	842	578	1656	674	339	1650x656	4	32	378	1398,0
42707	AMSTERDAM	836	736	578	650	568	339	644x550	2	7	125	652,0
42708	AMSTERDAM	1286	736	578	1100	568	339	1094x550	3	21	212	927,0
42709	AMSTERDAM	1536	736	578	1350	568	339	1344x550	3	21	260	1078,0
42710	AMSTERDAM	1986	736	578	1800	568	339	1794x550	4	35	347	1357,0
42711	AMSTERDAM 2doors	1986	986	578	1800	818	339	1794x800	4	50	499	1863,0
42712	AMSTERDAM 2doors	1986	1296	578	1800	1128	339	1794x1110	4	75	688	2325,0
42713	AMSTERDAM 2doors	1842	1522	578	1656	1354	339	1650x1336	4	72	760	2457,0
42714	AMSTERDAM	1042	872	728	856	704	489	850x686	2	18	295	1019,0
42715	AMSTERDAM	1292	872	728	1106	704	489	1100x686	3	27	381	1212,0
42716	AMSTERDAM	1542	872	728	1356	704	489	1350x686	3	27	467	1401,0
42717	AMSTERDAM	1842	872	728	1656	704	489	1650x686	4	36	570	1636,0
42718	AMSTERDAM 2doors	1842	1236	728	1656	1068	489	1650x1050	4	56	865	2344,0
42720	Mechanical combination lock, 1 mln combinations – instead of key lock											
42721	Electronic lock DFS S Plus (1 master code + 99 user codes), with electronic emergency opening, memory of 4050 last operations, possibility of copying data onto computer (audit) using a software and cable (see art. 42732)											
42722	Electronic lock DFS S (1 master code + 99 user codes), without electronic emergency opening, memory of 4050 last operations, possibility of copying data onto computer (audit) using a software and cable (see art. 42732)											
42723	Internal safe 200 mm high with cylindrical lock for all models, at extra charge											
42724	Internal safe 370 mm high with cylindrical lock for all models, at extra charge											
42725	File folder drawer on telescopic rods, moved out on telescopic rods (one file folder drawer replaces one shelf)											
42726	Shelf on telescopic rails, at extra charge											
42727	Built-in elements of an alarm system (internal depth reduces by 40mm) see 106-B-IV											
42728	Permanent shelf, up to 200kg of carrying weight, at extra charge											
42729	Shelf for registers for art. 42704-7 and 42709 -19, at extra charge											
42730	Surcharge for additional shelf (for 1-door safes)											
42732	CD-ROM and a transmiss. cable, programm. of closing and locking time, data reading (4050 events)											
42733	Surcharge for additional shelf (for 2-door safes)											
42734	surcharge for 3-spoke silver metal fitting											
42735	Drawer for individual arranging (height: front 100mm, sides and back 80mm)											
42736	Electronic lock DFS SB (1 master code + 9 user) instead of a key lock											
42737	Anchorage material (2 bolts M16x65 and 2 screws M16x110 to fix the safe)											

Weight, colour and dimension information is not binding. Any mistake, weight, colour and dimensions modification restricted.
Minor deviations from a given weight, colour and dimensions are inclined by a production process. Any technical modifications restricted.

Standard version: DB VdS class 2 with 1 rigid key and 1 articulated key (18 mm long) and additional mechanical lock VdS class 2 Hanging metal handle, protruding for 60mm, Latching mechanism, door opening angle 180°, right-side door (left-side door at request without any extra charge), 1 hole in a floor 21 mm, Paint coating/colour: RAL 7035

Series "Amsterdam" Class V

Class 5 EN 1143-1



30-minute fire-proof protection for paper to 840°C

COLOUR External dimensions approx. HxWxD (mm)

COLOUR Internal dimensions approx. HxWxD (mm)

COLOUR Clear dimensions approx. HxWxD (mm)

Dimensions - details [mm]


Art.No.	External height	External width	External depth	Internal height	Internal width	Internal depth	Clear passageway height	Clear passageway width	Clear internal depth (from closed door to back wall)	External depth with door open 90°	External depth with door open 90° and a key	Free space above files	Distance between top hole on the ladder and upper wall	Distance between first bottom hole on the ladder and the base	Minimum width of the cabinet with door to have a full clear door opening	Total width of the cabinet with door open 180°	Boltwork			Back
																	no of locking bolts	Dist ance mm	Top/ Bottom	
A	B	C	D	E	F	G	H	I	J	K	P	Q	R	S	T					
42701	842	672	538	656	504	299	650	486	299	1096	681	311	64	92	1099	1165	3	200	1/1	Overlapping profile
42702	942	672	538	756	504	299	750	486	299	1096	681	61	64	92	1099	1165	3	200	1/1	
42703	1042	672	538	856	504	299	850	486	299	1096	681	161	64	142	1099	1165	3	200	1/1	
42704	1242	672	538	1056	504	299	1050	486	299	1096	681	41	64	142	1099	1165	3	200	1/1	
42705	1542	842	578	1356	674	339	1350	656	339	1306	851	311	114	142	1377	1505	3	200	1/1	
42706	1842	842	578	1656	674	339	1650	656	339	1306	851	261	114	142	1377	1505	3	200	1/1	
42707	836	736	578	650	568	339	644	550	339	1200	745	305	58	142	1203	1293	3	200	1/1	
42708	1286	736	578	1100	568	339	1094	550	339	1200	745	55	58	142	1203	1293	3	200	1/1	
42709	1536	736	578	1350	568	339	1344	550	339	1200	745	305	108	142	1203	1293	3	200	1/1	
42710	1986	736	578	1800	568	339	1794	550	339	1200	745	85	108	142	1203	1293	3	200	1/1	
42711	1986	986	578	1800	818	339	1794	800	339	1061	995	85	108	142	1655	1798	3	200	je1/1	
42712	1986	1296	578	1800	1128	339	1794	1110	339	1216	1305	85	108	142	2175	2418	3	200	je1/1	
42713	1842	1522	578	1656	1354	339	1650	1336	339	1329	1531	261	114	142	2554	2870	3	200	je1/1	
42714	1042	872	728	856	704	489	850	686	489	1486	881	161	64	142	1426	1565	3	200	1/1	
42715	1292	872	728	1106	704	489	1100	686	489	1486	881	61	64	142	1426	1565	3	200	1/1	
42716	1542	872	728	1356	704	489	1350	686	489	1486	881	311	114	142	1426	1565	3	200	1/1	
42717	1842	872	728	1656	704	489	1650	686	489	1486	881	261	70	142	1426	1565	3	200	1/1	
42718	1842	1236	728	1656	1068	489	1650	1050	489	1321	1246	261	89	92	2107	2275	3	200	je1/1	

Load (in kN 1kN=100kg)

Art.No.	42701	42702	42703	42704	42705	42706	42707	42708	42709
Weight	584kg	647kg	694kg	806kg	1192kg	1398kg	652kg	927kg	1078kg
Surface	0,4m²	0,4m²	0,4m²	0,4m²	0,5m²	0,5m²	0,4m²	0,4m²	0,4m²
Load	16,0kN/m²	17,6kN/m²	19,1kN/m²	22,1kN/m²	24,3kN/m²	28,8kN/m²	15,2kN/m²	21,6kN/m²	25,2kN/m²

Art.No.	42710	42711	42712	42713	42714	42715	42716	42717	42718
Weight	1357kg	1863kg	2325kg	2457kg	1019kg	1212kg	1401kg	1636kg	2344kg
Surface	0,4m²	0,6m²	0,8m²	0,9m²	0,6m²	0,6m²	0,6m²	0,6m²	0,9m²
Load	31,9kN/m²	32,5kN/m²	30,8kN/m²	27,7kN/m²	16,0kN/m²	19,0kN/m²	21,9kN/m²	25,9kN/m²	25,9kN/m²

Art.No. 42701 Design with star grip vs. Surcharge

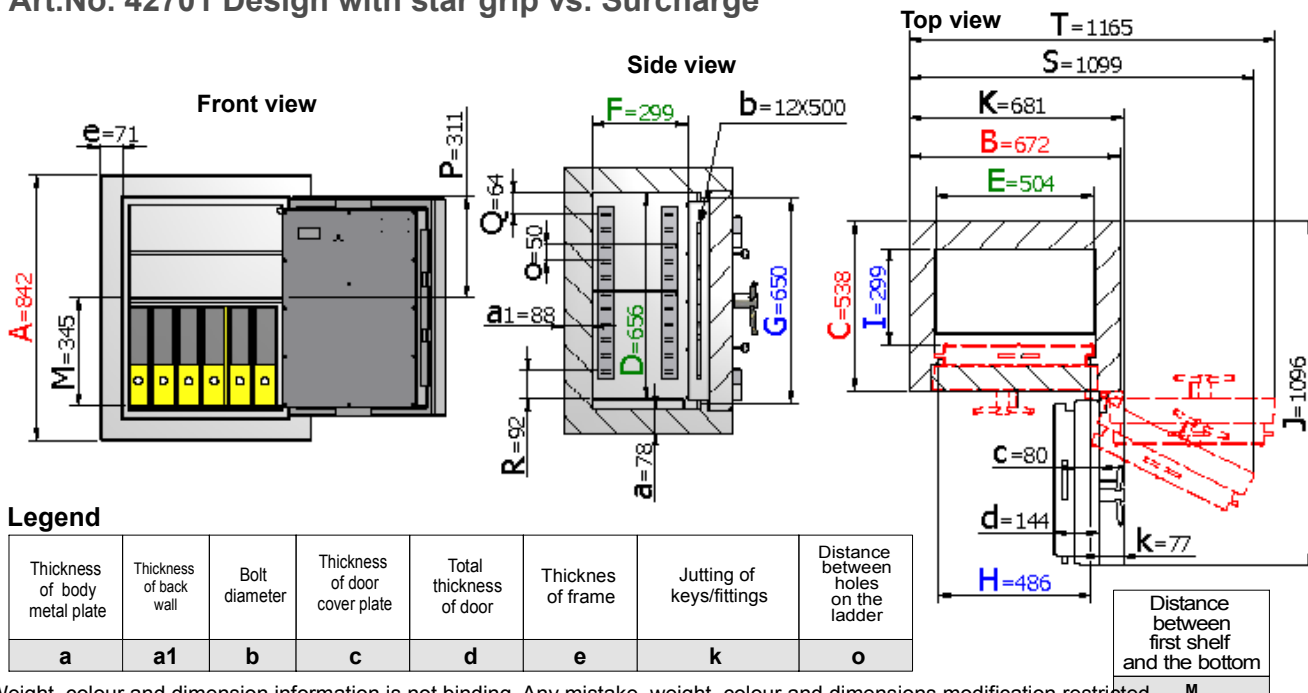

Weight, colour and dimension information is not binding. Any mistake, weight, colour and dimensions modification restricted. Minor deviations from a given weight, colour and dimensions are inclined by a production process. Any technical modifications restricted.

Series "Amsterdam" Class V




30-minute fire-proof protection for paper to 840°C

COLOUR External dimensions approx. HxWxD (mm)




COLOUR Internal dimensions approx. HxWxD (mm)

COLOUR Clear dimensions approx. HxWxD (mm)

Number of files and layout



● - Location of the hole for installing the alarm system (right door - standard)

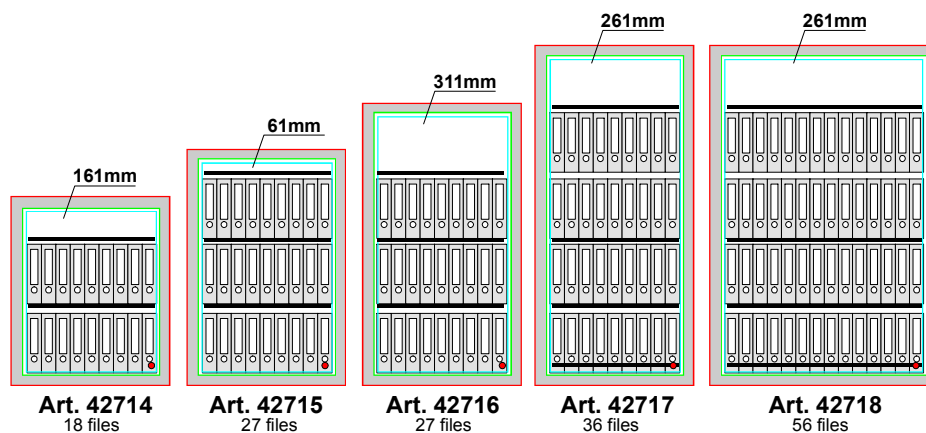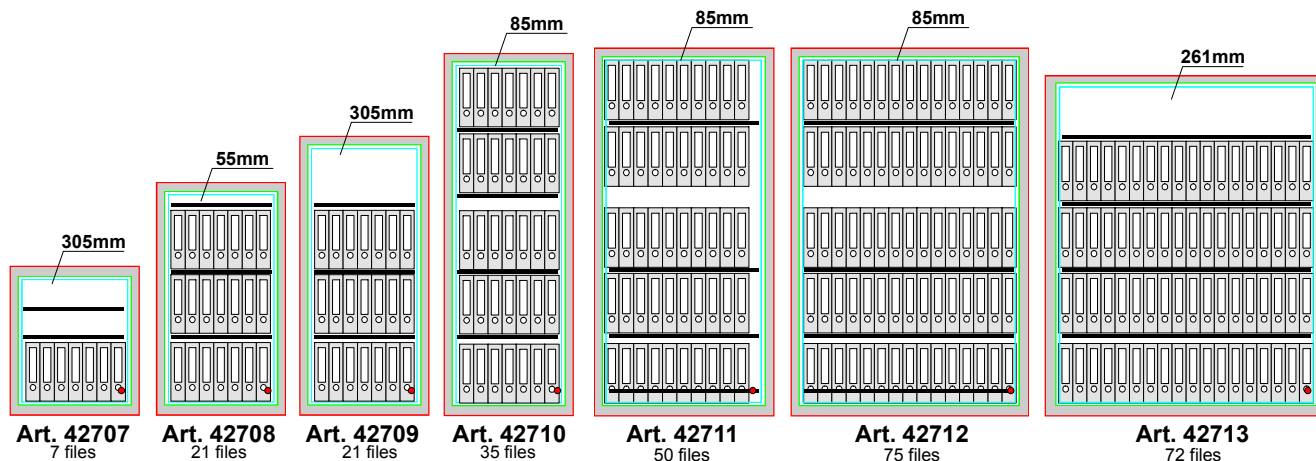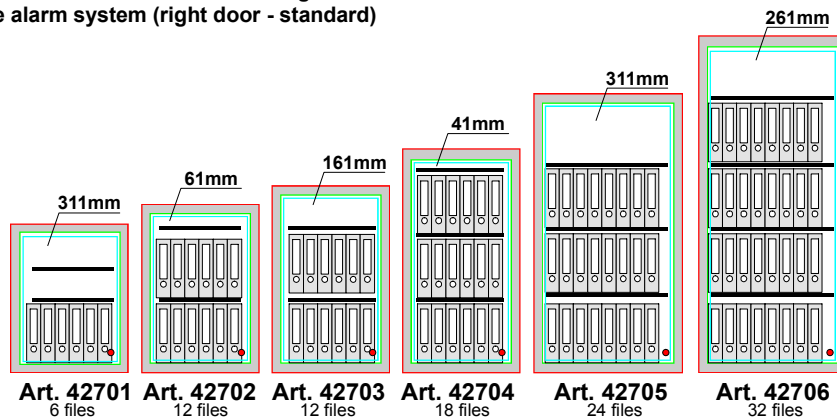

Series "Amsterdam" Class V



Class 5 EN 1143-1



LFS 30P


30-minute fire-proof protection for paper to 840°C

COLOUR External dimensions approx. HxWxD (mm)


COLOUR Internal dimensions approx. HxWxD (mm)

COLOUR Clear dimensions approx. HxWxD (mm)


Number of files and layout




Remaining space above/under the registers can be used for shelving (ordered separately) (see Art. 42730 and 72733).




Art.-Nr.42701
Alternatively
2 registers




Art.-Nr.42702
Alternatively
2 registers




Art.-Nr.42703
Alternatively
2 registers



Art.-Nr.42704
Alternatively
3 registers

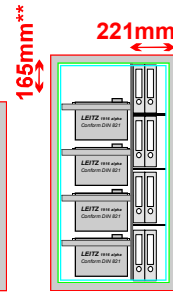


Art.-Nr.42705
Alternatively
4 registers

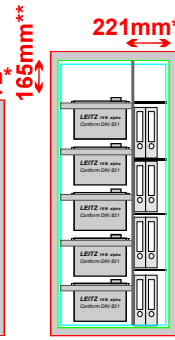


Art.-Nr.42706
Alternatively
5 registers




Art.-Nr.42707
Alternatively
2 registers

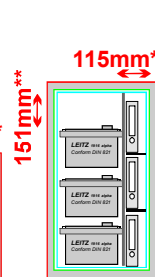


Art.-Nr.42708
Alternatively
3 registers

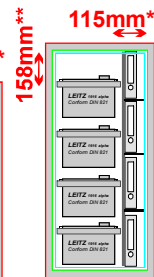


Art.-Nr.42709
Alternatively
4 registers

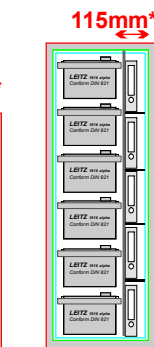


Art.-Nr.42710
Alternatively
6 registers

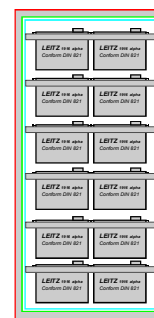


Art.-Nr.42711
Alternatively
6 x 2 registers

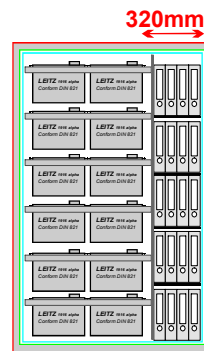


Art.-Nr.42712
Alternatively
6 x 2 registers

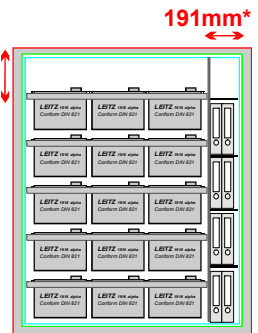


Art.-Nr.42713
Alternatively
5 x 2 registers

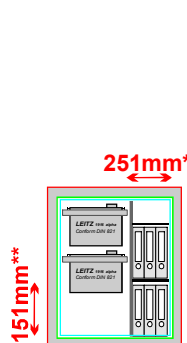


Art.-Nr.42714
Alternatively
2 registers

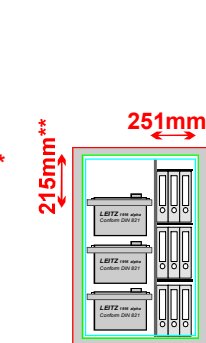


Art.-Nr.42715
Alternatively
3 registers

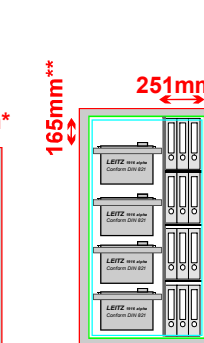

Art.-Nr.42716
Alternatively
4 registers

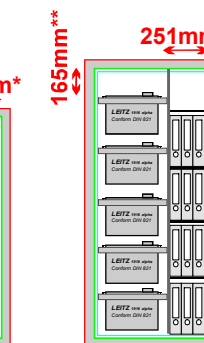

Art.-Nr.42717
Alternatively
5 registers

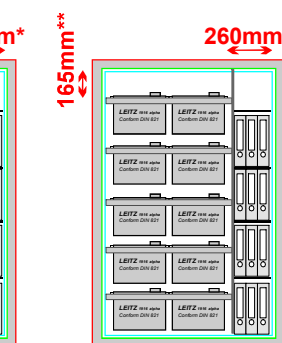

Art.-Nr.42718
Alternatively
5 x 2 registers

* on request at extra charge for models 42705 - 42710 and 42512 - 42518 there is a possibility of ordering a partition wall and adjustable shelves (as shown on the pictures)

** remaining space above/under the registers

Weight, colour and dimension information is not binding. Any mistake, weight, colour and dimensions modification restricted. Minor deviations from a given weight, colour and dimensions are inclined by a production process. Any technical modifications restricted.

**LFS 30P**

Item 42705 special equipment available at request at extra charge. **30-minute fire-proof protection for paper** thanks to special concrete and sealings! fire-proof protection LFS 30P in accordance with **European standard EN 15659** apart from the burglar-proof protection provides additional safety.

CI.5 EN 1143-1



Hanging handle, key and stand. combination lock




Hanging handle, key and electr. lock
Item No. 42521 and 42522



Individually arranged drawer each on telescopic rods, at request; as presented, it may be also offered as a block of drawers with cylindrical locks, at extra charge. Contact us, we can fulfill almost every arrangement requirement !

Components of the alarm system – see the picture below (on request also available separately).

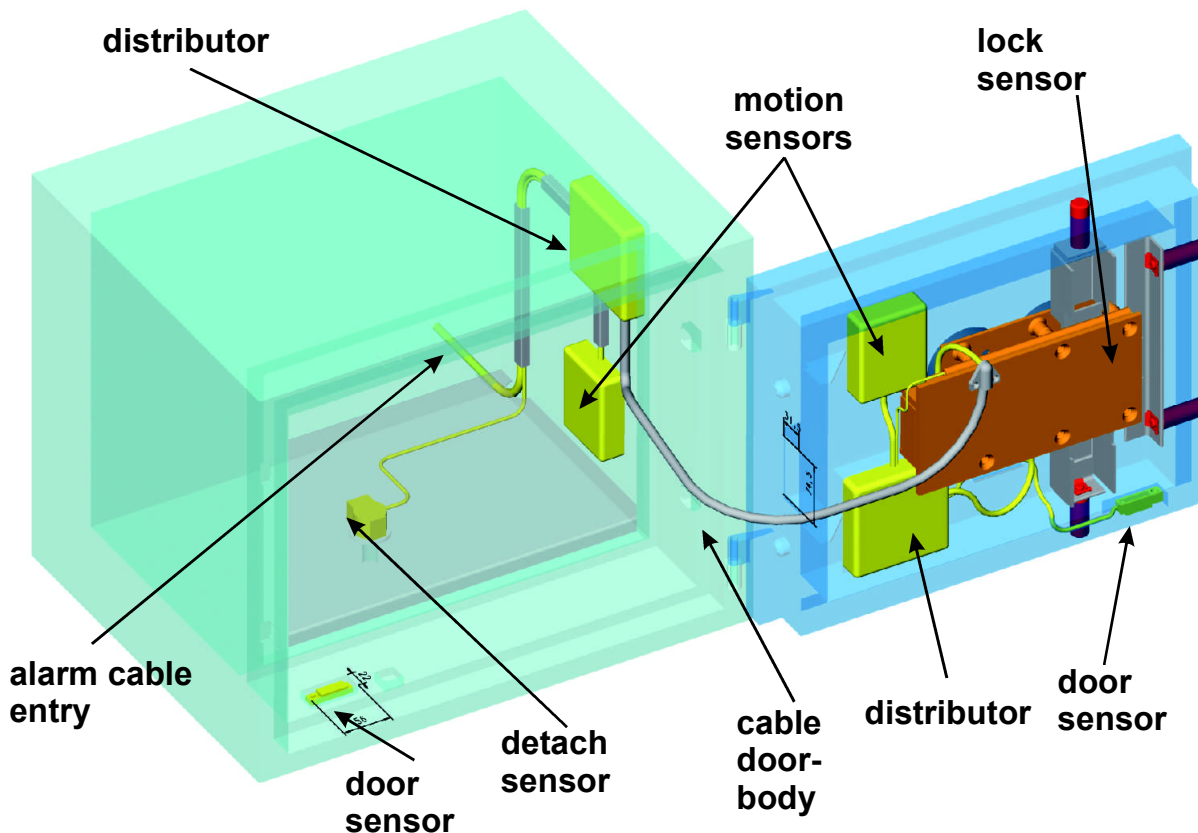

Components (also available separately):

motion sensor	Art. 81000	connecting cable	Art. 35352514
tester transmitter	Art. 81001	(5m, outside)	
detach sensor	Art. 81010	motion sensor cable	Art. 35352516
lock sensor	Art. 81015	door-body cable	Art. 35352515
door sensor	Art. 81021	(cable + cover)	
distributor	Art. 81022		

Weight, colour and dimension information is not binding. Any mistake, weight, colour and dimensions modification restricted. Minor deviations from a given weight, colour and dimensions are inclined by a production process. Any technical modifications restricted.